




## NPN Remote I/O Module 500V 32 Channels Digital Output Module 24VDC

Our Product Introduction

for more products please visit us on [connector-industrial.com](http://connector-industrial.com)

### Basic Information

- Place of Origin: Guangzhou, China
- Brand Name: KRONZ
- Certification: CE
- Model Number: KA0032N
- Minimum Order Quantity: 5 pieces
- Price: Negotiable
- Packaging Details: Paper box packing
- Delivery Time: 5-8 working days
- Payment Terms: T/T, Western Union, MoneyGram
- Supply Ability: 100000 pieces per month

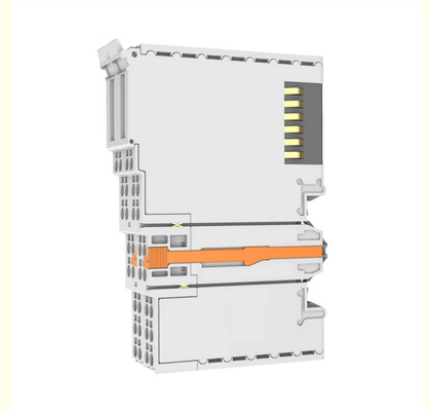

### Product Specification

- Product Name: IO Module
- Current Consumption: 106mA
- Input Voltage: 24VDC
- Allowed Range: 24VDC(±25%)
- Drive Capability: Single Channel 550mA
- Load Type: Resistive Load, Inductive Load, Lamp Load
- Isolation And Withstand Voltage: 500V
- Operation Temperature: 0~55
- Highlight: Remote I/O Module 500V,  
NPN Remote I/O Module,  
Digital Output Module 24VDC

## Product Description

### Remote IO Module 500V 32 Channels Digital Output Module NPN Output 24VDC


#### Product Description

EtherCAT (Ethernet Control Automation Technology) is an open architecture, an Ethernet-based field bus system, and its name CAT is the abbreviation of the prefix of Control Automation Technology. EtherCAT is a deterministic industrial Ethernet, which was originally developed by the German company Beckhoff. Automation usually requires shorter update times (or cycle times) for communication, low communication jitter when synchronizing data, and low hardware costs. The purpose of EtherCAT's development is to allow Ethernet to be used in automation applications.


#### Technical Data

Product model	KA0032N
Product Name	32 channels digital output module
<b>Power Specification</b>	
Current Consumption	106mA
Input Voltage	24VDC
Allowed Range	24VDC(±25%)
<b>Output Characteristics</b>	
Number of Output Channels	32
Output Single Type	PNP
Output Rated Voltage	24VDC(±20% )
Drive Capability	Resistive load, inductive load, lamp load
Isolation and withstand voltage	500V
Isolation method	Optocoupler isolation
<b>Physical Property</b>	
Dimension	100mm x 69.65mm x 24mm
Operation Temperature	0~55
Protection Grade	IP20


Module installation diagram



Module disassembly diagram



#### Application Scenarios

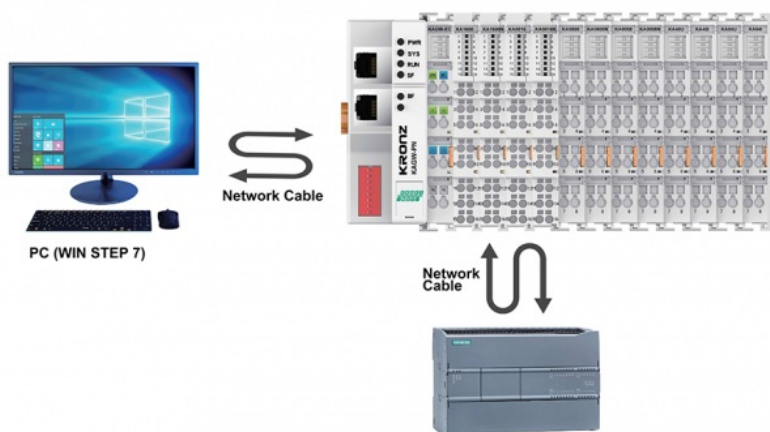

#### Adapter connected to power supply

