



NPN Remote I/O Module 16 Channels for Warehousing and Logistics Automation

Our Product Introduction

for more products please visit us on connector-industrial.com

Basic Information

- Place of Origin: Guangzhou, China
- Brand Name: KRONZ
- Certification: CE
- Model Number: KA1600N
- Minimum Order Quantity: 5 pieces
- Price: Negotiable
- Packaging Details: Paper box packing
- Delivery Time: 5-8 working days
- Payment Terms: T/T, Western Union, MoneyGram
- Supply Ability: 100000 pieces per month



Product Specification

- Model: Remoted I/O Module
- Name: 16 Channels Digital Input Module
- Input Voltage: 24VDC
- Allowed Range: 24VDC(±25%)
- Input Type: NPN
- Protection Grade: IP20
- Highlight: **NPN Remote I/O Module 16 Channels , Warehousing NPN Remote I/O Module , Logistics Automation Remote I/O Module**



Product Description

Distributed I/O Module NPN 16 Channels Digital for Warehousing and Logistics Automation


Product Description

Application in warehousing and logistics automation:


In automated warehouses and logistics systems, distributed I/O modules can be installed in various locations such as conveyor lines, stackers, sorting equipment, etc. to collect information such as the location, quantity, and weight of goods to achieve accurate monitoring of the warehousing and logistics process. manage. For example, in e-commerce logistics centers, distributed I/O modules can monitor the incoming and outgoing of goods in real time, improving the efficiency and accuracy of logistics operations.

Technical Data


Product model	KA1600N
Product Name	16 channels digital input module
Power Specification	
Current Consumption	35mA
Input Voltage	24VDC
Allowed Range	24VDC(±25%)
Output Characteristics	
Number of Output Channels	16
Input Single Type	NPN
Input Rated Voltage	0VDC(±3V)
Input logic 1 signal	-3~3V
Input logic 0 signal	15~30V
Debounce time	Configurable:1~10ms,Default value 3ms
Typical value of input current	3mA
Isolation and withstand voltage	500V
Isolation method	Optocoupler isolation
Physical Property	
Dimension	100mmx69.65mmx12mm
Operation Temperature	0~55
Storage temperature	-25~85
Protection Grade	IP20

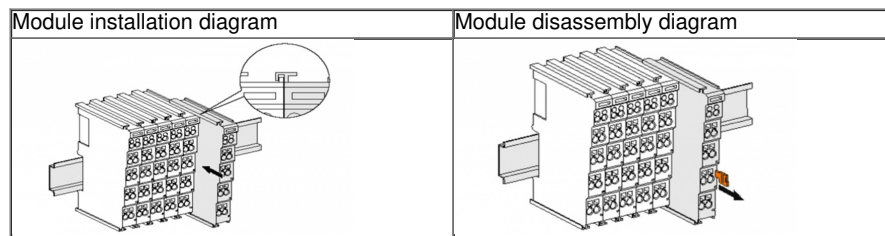

Application Scenarios

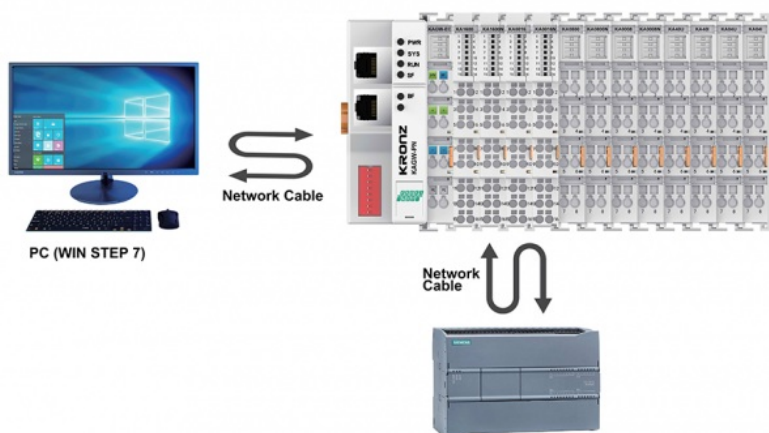

Adapter connected to power supply

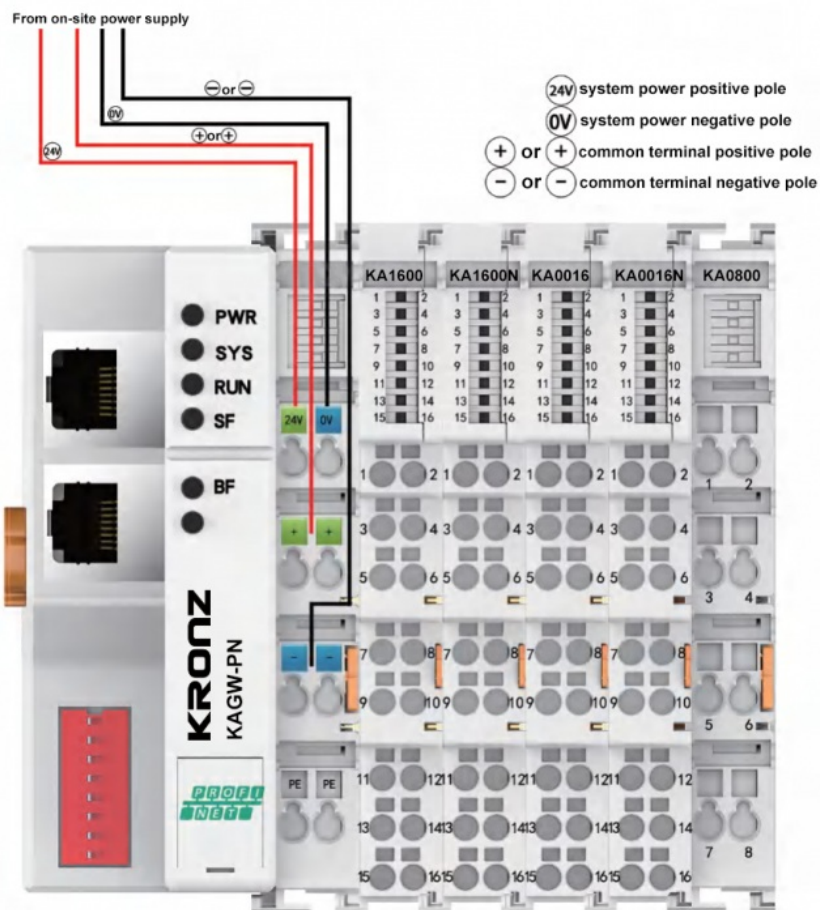

KRONZ Kronz (guangzhou) Electronics Co., Ltd.



+8618924160375



sales02@kronz.cn



connector-industrial.com

6th Floor, B602 Building, No.10, Rong Jing 2nd Road, Yu Shan Guo Ji, Yong Ning Street, Zeng Cheng District, Guangzhou, P.R.China