



7/8"-16UN Automation 3 Pin Male Connector Pre Assembled Cable Waterproof

Our Product Introduction

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: KRONZ
- Certification: CE
- Model Number: M7803M-2/P00R
- Minimum Order Quantity: 50 pieces
- Price: Negotiable
- Packaging Details: Polybag packing
- Delivery Time: 5-8 working days
- Payment Terms: T/T, Western Union, MoneyGram
- Supply Ability: 100000 pieces per month



Product Specification

- Description: 7/8" Cable Connector
- Thread: 7/8" -16UN
- Pin: 3
- Type: Straight
- Application: Industrial Automation
- Contact Resistance: $\leq 5\text{m}\Omega$
- Highlight: 7/8"-16UN 3 Pin Male Connector,
3 Pin Male Connector Waterproof,
7/8"-16UN Automation Connector




Product Description

7/8"-16UN Connector Automation Pre-assembled Cable 3Pin Male Straight Waterproof

Product Description

In industrial automation control systems, 7/8" connectors enable stable transmission of signals. For example, in the connection between sensors and controllers, it ensures that precise measurement data can be transmitted accurately, allowing The control system can make timely and accurate decisions. For example, the pressure data collected by the pressure sensor is transmitted to the controller through the 7/8" connector, and the controller adjusts the operating parameters of the production equipment based on these data. In industrial automation control systems, 7/8" connectors enable stable transmission of signals. For example, in the connection between sensors and controllers, it ensures that precise measurement data can be transmitted accurately, allowing The control system can make timely and accurate decisions. For example, the pressure data collected by the pressure sensor is transmitted to the controller through the 7/8" connector, and the controller adjusts the operating parameters of the production equipment based on these data.

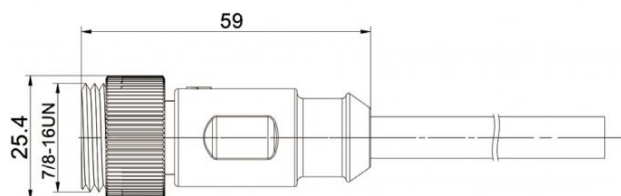

Technical Data

Thread type	7/8"-16UN
Contact nut material	Brass, nickel-plated
Contact surface material	Brass, gold-plated
Contact carrier material	PA, black
Housing material	TPU, black
Seal material	FPM/FKM
Insulation resistance	≥100MΩ
Contact resistance	≤5mΩ
Pollution degree	3
Ambient temperature	-25~+85
Mating cycles	>100
Degree of protection	IP67

Pin assignment	Connection method	Coding	Rated current	Voltage	Wire gauge	Cable outlet	Length	Model No.
	1 = GN/YE 2 = BN 3 = BU	A	8A	600V	3×0.15 (3×16AWG) PVC, black	Straight	2M	M7803M-2/P00R
							5M	M7803M-5/P00R
							10M	M7803M-10/P00R

*Cable length:2/5/10m,other cable lengths are available on request! Freely selectable cable material(P00R:black,PVC,P01R:black,PUR)

KRONZ Kronz (guangzhou) Electronics Co., Ltd.



+8618924160375



sales02@kronz.cn



connector-industrial.com

6th Floor, B602 Building, No.10, Rong Jing 2nd Road, Yu Shan Guo Ji, Yong Ning Street, Zeng Cheng District, Guangzhou, P.R.China