



Molded Cable M12 Connectors IEC 61076-2-101 PIN3 A Coding Male Angled

Our Product Introduction

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: KRONZ
- Certification: CE
- Model Number: M1203MA-2/P00R
- Minimum Order Quantity: 50 pieces
- Price: Negotiable
- Packaging Details: Polybag packing
- Delivery Time: 5-8 working days
- Payment Terms: T/T, Western Union, MoneyGram
- Supply Ability: 100000 pieces per month



Product Specification

- Product Name: M12 Connectors With Molded Cable
- Seal Material: FPM/FKM
- IP Rate: IP67
- Standard: IEC 61076-2-101
- Ambient Temperature: Ambient Temperature -25~+85
- Insulation Resistance: $\geq 100M\Omega$
- Contact Resistance: $\leq 5m\Omega$
- Pollution Degree: 3
- Highlight: **Molded Cable M12 Connectors, M12 Connectors IEC 61076-2-101, M12 Male Connectors PIN3**




Product Description

M12 Connectors with molded cable IEC 61076-2-101 PIN3 codingA Male Angled

Product Description

Cable length:2/5/10m,other cable lengths are available on request! Freely selectable cable material(P00R:black,PVC ,P01R:black,PUR) For more details, please consult our customer service. Thank you.The M12 aviation plug connector is made of special PVC oxygen free copper material twisted pair double shielded, with an environmentally friendly PVC outer cover that is resistant to bending and pulling, ensuring the durability of the product. There are shielded and unshielded options available.

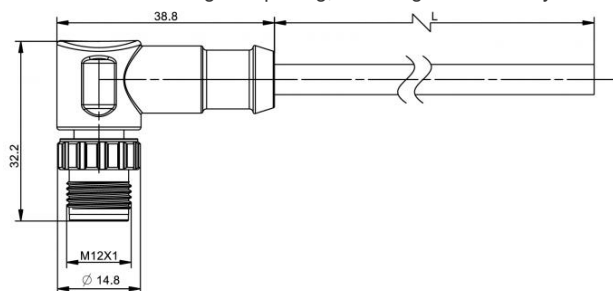

Technical Data

| | |
|--------------------------|--------------------------|
| Standard | IEC 61076-2-101 |
| Contact nut material | Brass, nickle-plated |
| Contact surface material | Brass, gold-plated |
| Contact carrier material | PA, black |
| Housing material | TPU, black |
| Seal material | FPM/FKM |
| Insulation resistance | $\geq 100\text{M}\Omega$ |
| Contact resistance | $\leq 5\text{m}\Omega$ |
| Pollution degree | 3 |
| Ambient temperature | -25~+85 |
| Mating cycles | >100 |
| Degree of protection | IP67 |

| Pin assignment | Connection method | Codin g | Rated current | Voltage | Wire gauge | Cable outlet | Length | Model No. |
|----------------|----------------------|---------|---------------|---------|-----------------------------------|--------------|--------|-----------------|
| | 1=BN 3=BU 4=BK | A | 4A | 250V | 3×0.34 (3×22AWG) PVC, black | Angled | 2M | M1203MA-2/P00R |
| | | | | | | | 5M | M1203MA-5/P00R |
| | | | | | | | 10M | M1203MA-10/P00R |

KRONZ Kronz (guangzhou) Electronics Co., Ltd.



+8618924160375



sales02@kronz.cn



connector-industrial.com

6th Floor, B602 Building, No.10, Rong Jing 2nd Road, Yu Shan Guo Ji, Yong Ning Street, Zeng Cheng District, Guangzhou, P.R.China