Guangdong, China

F1208M-0.5R/M16

Polybag packing

5-8 working days

100000 pieces per month

KRONZ

Negotiable

CE

# Panel Mount M12 Connector Male Rear Mounting PCB Version M16 X 1.5 IP67

## **Basic Information**

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity: 50 pieces
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms: T/T, Western Union, MoneyGram
- Supply Ability:



# **Product Specification**

• Type:

• Voltage:

Contacts:

• Standard:

• Contact Nut Material:

Contact Surface Material:

- Decription:
- M12 Connector Male Flange Connectors 30V 0.5m Pre-wired IEC 61076-2-101 Brass, Nickle-plated Brass, Gold-plated
- Contact Carrier Material: PA, Blac
- Highlight:
- PA, Black Panel Mount M12 Connector, PCB Version M12 Connector Male, Rear Mounting M12 Connector Male




Our Product Introduction

## M12 Panel Mount Connectors Male Rear mounting PCB version M16 x 1.5 IP67

### **Product Description**

M12 panel mounted connector male head is a reliable choice in the field of electronic connections. Adopting a post installation method facilitates convenient installation in various devices. PCB version design ensures stable circuit connections. It has the specification of M16 x 1.5, precise size, and strong compatibility. This connector male head has excellent durability and antiinterference performance, and can maintain stable connections in complex working environments. Whether it is industrial automation equipment or communication electronic equipment, it can play an excellent connecting role, providing efficient and reliable connection solutions for your projects, and helping your business to proceed smoothly.

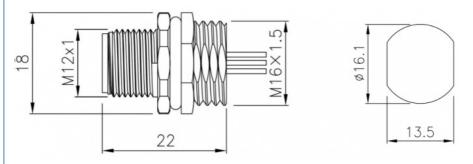

#### **Technical Data**

	Standa	ard		IEC 61076-2-101						
Contact nut material						Brass, nickle-plated				
Contact surface material						Brass, gold-plated				
Contact carrier material						PA, black				
Housing material						Brass, nickel-plated				
Seal material						FPM/FKM				
Insulation resistance						≥100MΩ				
Contact resistance						≤5mΩ				
Pollution degree						3				
Ambient temperature						-25~+85				
Mating cycles						>100				
Degree of protection					IP67					
								1		
Pin	Mounting	Coding	Rated	Vo	ltage	Cable	Contacts	Part No.		
assignment	type	County	current		onage	outlet	termination	Tarrito.		

assignment	type	County	current	vollage	outlet	termination	Tart NO.
	Rear mounting	A	2A	30V	Straight	0.5m Pre-wired	F1208M- 0.5R/M16

# KRONZ Kronz (guangzhou) Electronics Co., Ltd.

+8618924160375

sales02@kronz.cn

© connector-industrial.com

6th Floor, B602 Building, No.10, Rong Jing 2nd Road, Yu Shan Guo Ji, Yong Ning Street, Zeng Cheng District, Guangzhou, P.R.China