



BP18Y Through-Beam Photoelectric Sensor 50mm-10m Range NPN Output IP67 High Reliability

Our Product Introduction

for more products please visit us on connector-industrial.com

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: KRONZ
- Certification: CE
- Model Number: BP18Y-T10N
- Minimum Order Quantity: 1
- Price: Negotiable
- Packaging Details: Polybag packing
- Delivery Time: 5-8 working days
- Payment Terms: T/T, Western Union, MoneyGram
- Supply Ability: 10000 pieces per month



Product Specification

- Detection Distance: 50mm-10m
- Sensing Method: Through Beam
- Signal Output: NPN Output
- Power: 20 VDC \pm 10%
- Power Consumption: Max. 300mW, Max. Voltage: 24V
- Control Output: NPN&PNP: Open Collector Output 24V, Max.100mA(only For Main Unit) Residual Voltage:1V



Product Description

BP18Y-T10N Through-Beam Photoelectric Sensor: Maximum Reliability for Critical Detection Tasks

The BP18Y-T10N through-beam photoelectric sensor delivers uncompromised performance for applications requiring the highest level of detection reliability. With a robust sensing range of 50mm to 10 meters, this sensor pair ensures precise object detection even in challenging industrial environments. The through-beam design provides superior immunity to object color, surface finish, and environmental factors, making it the ideal choice for critical automation tasks.

Key Features

Exceptional Sensing Range: 50mm to 10-meter detection distance for versatile application coverage

Through-Beam Reliability: Highest immunity to object characteristics and environmental conditions

Dual Output Configuration: Compatible with both NPN and PNP systems via open collector output

Ultra-Fast Response: <1ms response time for high-speed automation applications

Industrial Durability: IP67-rated housing withstands harsh conditions including dust and moisture exposure

Clear Visual Status: Dual LED indicators for instant power and output status monitoring

Feature	Specification
Sensing Type	Through-beam
Part Number	BP18Y-T10N
Detection Distance	50mm - 10 meters
Signal Output	NPN Output
Connection	2 meter cable output

KRONZ



KRONZ



BP18Y Series

Cylindrical Photoelectric Sensor

- Compact design for easy installation
- Clear indicator for status monitoring
- Wide variety of models available
- Equipped with automatic anti-interference function




Technical Parameters

Type	Direct Diffuse	Diffuse-Transparent	Diffuse-Background	Retro-reflective	Through Beam
NPN	BP18Y-D500N	BP18Y-H150N	BP18Y-G100N	BP18Y-R3500N	BP18Y-T10N
PNP	BP18Y-D500P	BP18Y-H150P	BP18Y-G100P	BP18Y-R3500P	BP18Y-T10P
Detection Distance	10-500mm	10-150mm	20-100mm	30-3500mm	50mm-10m
Response Time	< 1ms				
Control Output	NPN&PNP: open collector output 24V, Max.100mA(only for main unit) residual voltage:1V				
Output Option	LIGHT-ON/DARK-ON configured via white control wire: Connect white wire to GND for DARK-ON; Connect to brown wire or leave open for LIGHT-ON				
Output Function	1 output pot, Short-Circuit Protection, Auto Anti-Interference Function				
Power	12 to 24VDC \pm 10%, Ripple (P-P): Max. 10% (Class 2)				
Light Source	Red light 635nm, 4-element LED array				
Indicator	Green LED indicator indicates power, and red LED indicator indicates output				
Power Consumption	Standard Mode: Max. 300mW, Max. Voltage: 24V				
Ambient Light Level	Incandescent light: Max: 20,000lux, Sunlight: Max: 30,000lux				
Ambient Temperature	-10 to +55°C (non-freezing)				
Vibration resistance	10 to 55Hz, double amplitude: 1.5mm, 2 hours each for X, Y, Z axes				
Connection	Flying leads, 2m cable				




Circuit diagram

DC NPN output




*LIGHT-ON mode WH—Connect to brown wire or left floating
DARK-ON mode WH—0V

DC PNP output



*LIGHT-ON Mode WH—Connect to brown wire or left floating
DARK-ON mode WH—0V

Dimension

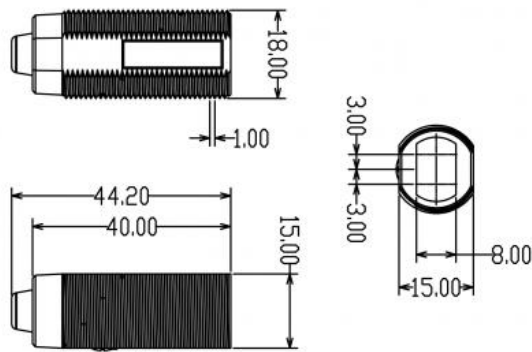

Photoelectric Sensors

KRONZ Kronz (guangzhou) Electronics Co., Ltd.

+8618924160375

sales02@kronz.cn

connector-industrial.com

6th Floor, B602 Building, No.10, Rong Jing 2nd Road, Yu Shan Guo Ji, Yong Ning Street, Zeng Cheng District, Guangzhou, P.R.China