



M12 Y-distributor with Cable Male M12x1 - Female M12x2


Basic Information

- Place of Origin: Guangdong, China
- Brand Name: KRONZ
- Certification: CE
- Model Number: YKM4-2F3-0.2-0.2/P00K/L04
- Minimum Order Quantity: 20 pieces
- Price: Negotiable
- Packaging Details: Polybag packing
- Delivery Time: 5-8 working days
- Payment Terms: T/T
- Supply Ability: 100000 pieces per month



Product Specification

- Part No.: YKM4-2F3-0.2-0.2/P00K/L04
- Standard: IEC 61076-2-101
- Contact Carrier Material: Plastic, PA, Black
- Material Of Grip Body: Plastic, TPU, Black
- Contact Nut Material: Alloy, Copper-zinc, Nickel Plating
- Contact Material: Alloy, Copper-zinc, Gold Plating
- Highlight: **M12x2 M12 Y-distributor,
Cable M12 Y-distributor,
M12x1 M12 Y-distributor**

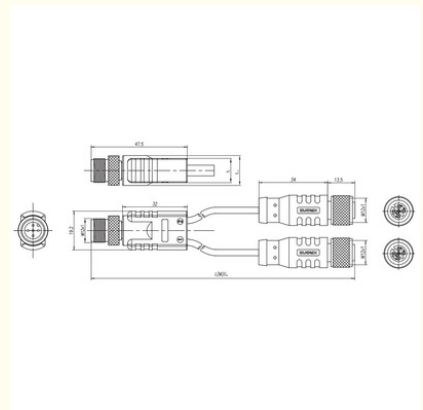

More Images

KRONZ



Product Description

Technical data:

2-way Splitter, Y-type Splitter

Part Number: YKM4-2F3-0.2-0.2/P00K/L04

Cable: PVC, Black or PUR, Black

RoHS compliant

IP67

Cable Length: 0.2M / 2M / Customized Length

Standard	IEC 61076-2-101	Insulation resistance	≥100MΩ
Contact nut material	Alloy, copper-zinc, nickel plating	Contact resistance	≤5mΩ
Contact material	Alloy, copper-zinc, gold plating	Pollution degree	3
Contact carrier material	Plastic, PA, black	Ambient temperature	-25~+85°C
Material of grip body	Plastic, TPU, black	Mating cycles	>100
Seal material	FPM/FKM	Degree of protection	IP67
Cable	PVC/PUR	Part No.	YKM4-2F3-0.2-0.2/P00K/L04

Product Series Information

Other chip count products in this series

Each model is different:

Choose the product that suits you based on the circuit, number of pins, and voltage/current rating.

Technical data						
Standard	IEC 61076-2-101	Insulation resistance	≥ 100MΩ			
Contact nut material	Alloy, copper-zinc, nickel plating	Contact resistance	≤ 5mΩ			
Contact material	Alloy, copper-zinc, gold plating	Pollution degree	3			
Contact carrier material	Plastic, PA, black	Ambient temperature	-25~+85°C			
Material of grip body	Plastic, TPU, black	Mating cycles	>100			
Seal material	FPM/FKM	Degree of protection	IP67			

Circuit diagram	Rated current	Voltage	Pin assignment	Length	Cable	Part No.
 L04	4A	250V	 Male 2xFemale	0.2M	PVC	YKM4-2F3-0.2-0.2/P00K/L04
				2M	PVC	YKM4-2F3-2-2/P00K/L04
				0.2M	PUR	YKM4-2F3-0.2-0.2/P01K/L04
				2M	PUR	YKM4-2F3-2-2/P01K/L04
 L05	4A	250V	 Male 2xFemale	0.2M	PVC	YKM5-2F4-0.2-0.2/P00K/L05
				2M	PVC	YKM5-2F4-2-2/P00K/L05
				0.2M	PUR	YKM5-2F4-0.2-0.2/P01K/L05
				2M	PUR	YKM5-2F4-2-2/P01K/L05
 L14	4A	250V	 Male 2xFemale	0.2M	PVC	YKM4-2F4-0.2-0.2/P00K/L14
				2M	PVC	YKM4-2F4-2-2/P00K/L14
				0.2M	PUR	YKM4-2F4-0.2-0.2/P01K/L14
				2M	PUR	YKM4-2F4-2-2/P01K/L14
 L15	4A	250V	 Male 2xFemale	0.2M	PVC	YKM5-2F5-0.2-0.2/P00K/L15
				2M	PVC	YKM5-2F5-2-2/P00K/L15
				0.2M	PUR	YKM5-2F5-0.2-0.2/P01K/L15
				2M	PUR	YKM5-2F5-2-2/P01K/L15

* Standard lengths are 0.5/2/5 meters; custom lengths are available.* Cable options include P00K (PVC black) and P01K (PUR black).

* For more model combinations and circuit customization, please contact us separately.



+8618924160375



sales02@kronz.cn



connector-industrial.com

Floor 7, Building 12B, Hanhe Robot Intelligent Manufacturing Base Exhibition Center, Xiangshan Avenue,
Zengcheng Economic Development Zone, Guangzhou, Guangdong Province, China