



32ms Industrial Ultrasonic Sensors Switching Output 50-500mm 5pin M12 Connector

Our Product Introduction

for more products please visit us on connector-industrial.com

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: KRONZ
- Certification: CE
- Model Number: U18-D500N(P)32T-R00A
- Minimum Order Quantity: 10 pieces
- Price: Negotiable
- Packaging Details: Polybag packing
- Delivery Time: 5-8 working days
- Payment Terms: T/T, Western Union, MoneyGram
- Supply Ability: 100000 pieces per month



Product Specification

- Detection Range: 50-500mm
- Resolution: 0.15mm
- Repeatability: $\pm 0.15\%$ F.S.
- Supply Voltage: 10-30V DC, reverse-polarity Protection
- Switching Frequency: 31Hz
- Red LED: No Object Detected: Lights Up, Teaching-in
When No Object Detected: Flashes
- Load Impedance: I/ 300 Ohm, U/ 1k Ohm
- No-load Current: $\leq 30\text{mA}$
- Highlight: **32ms Industrial Ultrasonic Sensors,
5pin M12 Connector Industrial Ultrasonic
Sensors
, 500mm Industrial Ultrasonic Sensors**



Product Description

Ultrasonic Sensor Switching Output 50-500mm 5pin M12 Connector 32ms

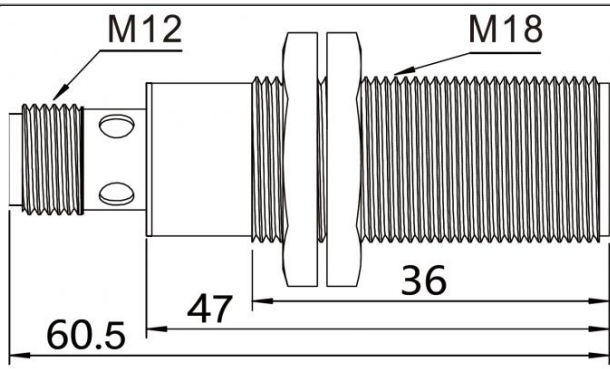
Product Description

Main Feature:

- M18 installation threaded sleeve
- Easy to instal

Basic Feature:

- 1 pc npn or pnp switching output
- Support digital RS485, modbus-rut standard protocol communication
- Analog voltage output 0-10V or analog current output 4-20 mA
- Implementing detection distance learning function through gray lines
- Temperature compensation
- Standard operating voltage DC 10-30V

Model	U18-D500N(P)32T-R00A
Detection range	50-500mm
Blind zone	0-50mm
Resolution	0.15mm
Repeatability	±0.15%F.S.
Accuracy	±1%(built-in temperature drift compensation)
Response time	32ms
Switching hysteresis	2mm
Switching frequency	31Hz
Initialization time	500ms
Supply voltage	10-30V DC,reverse-polarity protection
Red LED	no object detected:Lights up, teaching-in when no object detected:Flashes
Green LED	object detected:Lights up, teaching-in when object detected:Flashes
Overcurrent protection	200mA,Red LED and Green LED flashing at the same time
Load impedance	I/ 300 Ohm,U/ 1k Ohm
No-load current	≤30mA
Input type	teach-in and synchronization
Material	Copper nikel-plated,plastic fittings,glass epoxy resin.
Enclosure rating	IP67
Connection type	5pin, M12 connector
Ambient temperature	-25 ~+70 (248~343K)
Storage temperature	-40 ~+85 (233~358K)
Weight	35g
Output type	N32: 2 npn switching output NO/NC P32: 2 pnp switching output NO/NC
Dimensional drawing	 <p>The drawing shows a side view of the sensor. It has an M12 connector on the left and an M18 threaded sleeve on the right. Dimensions are indicated: a total length of 60.5mm from the M12 connector face to the end of the M18 sleeve, a distance of 47mm from the M12 connector face to the start of the M18 sleeve, and a length of 36mm for the M18 sleeve itself.</p>

KRONZ Kronz (guangzhou) Electronics Co., Ltd.



+8618924160375



sales02@kronz.cn



connector-industrial.com

6th Floor, B602 Building, No.10, Rong Jing 2nd Road, Yu Shan Guo Ji, Yong Ning Street, Zeng Cheng District,

